

## Case Study

application	Permanent Geosynthetic Wrapped Face MSE Wall
location	North America
product	Miramesh® SG, Miragrid® 10XT & 5XT

TenCate™ develops and produces materials that function to increase performance, reduce costs and deliver measurable results by working with our customers to provide advanced solutions.

### THE CHALLENGE

Today, Mechanically Stabilized Earth (MSE) retaining walls are commonplace on building sites and along roadways. The typical wall facing is a precast concrete facing panel and masonry block. However, through innovation and design, TenCate has developed the first permanent geosynthetic wrapped face MSE wall using Miramesh® SG synthetic grass geosynthetic combined with Miragrid® XT geogrid soil reinforcement.


### THE DESIGN

On this project, significant grade changes were encountered on a new highway alignment through beautiful mountainous terrain. Vertical retaining walls were needed to support the new roadway in the limited access space. In order to satisfy the project economics, the owner chose MSE retaining walls. Although there are many types of MSE retaining walls, geosynthetic

ic wrapped face MSE walls provide vertical grade separations at significantly less cost. However, the long term design life of the geosynthetic face has always been the limiting factor in their use. The MSE wall system design providing the best solution was Miramesh® SG synthetic grass-geosynthetic wrapped face MSE wall with Miragrid® XT soil reinforcement geogrids. The benefit to the owner is an economical and structurally sound permanent green wall face with no maintenance.

### THE CONSTRUCTION

Miramesh® SG synthetic grass face geosynthetic consists of an 18 inch wide synthetic grass strip embedded in the 8 ft wide Miramesh® biaxial green geogrid mesh. The artificial grass strip makes up the exposed wall face while the remaining Miramesh® SG is used as an embedment anchor into the wall structure. Temporary forms were used at the wall face in the installation of the geosynthetic wrapped face MSE wall. Miramesh® SG is placed inside the tempo

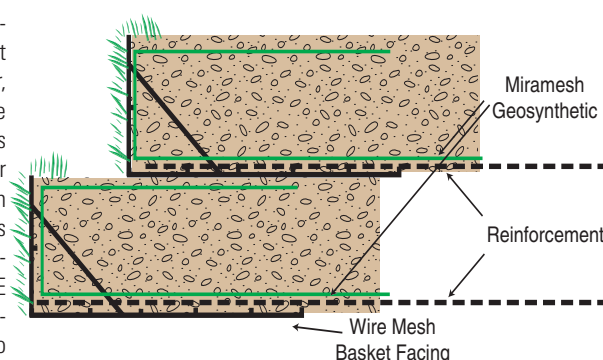

rary form. On this project, the contractor chose two types of forming systems. On one wall temporary wood forms were attached to steel brackets inserted into the wall face and moved up with each geogrid lift. On another wall, the contractor bent welded wire reinforcement into L-shaped wire baskets.



Miramesh® SG synthetic grass wall face



Wood forms used during wall installation

Protective & Outdoor Fabrics

Aerospace Composites

Armour Composites

Geosynthetics

Industrial Fabrics


Synthetic Grass

### THE PERFORMANCE


In a beautiful mountain area with large vertical grade separations, permanent geosynthetic wrapped face MSE walls were constructed along the new highway alignment. On this project, the use of Miramesh® SG synthetic grass face wall facing provides aesthetically pleasing, economical, structurally sound and maintenance free MSE retaining walls. The walls reach heights of 40ft. The total wall area exceeds 50,000SF of wall face.



Wire baskets used during wall installation

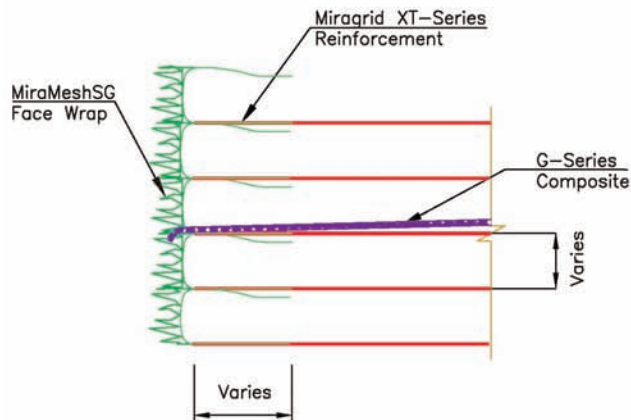

CROSS SECTION DETAIL  
NOT TO SCALE

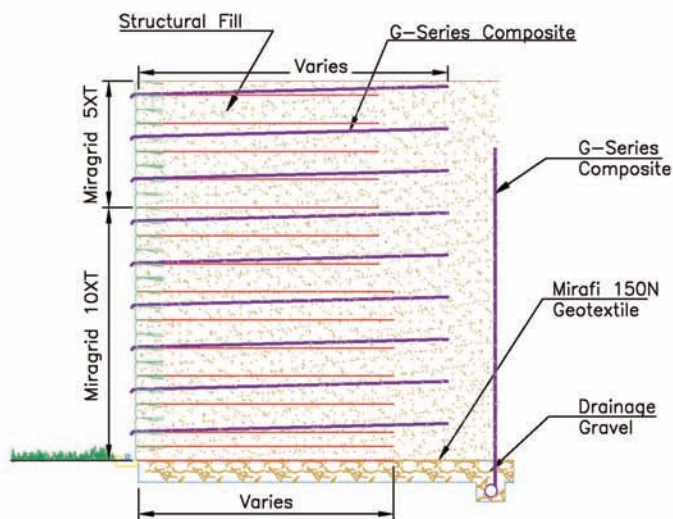

CROSS SECTION DETAIL  
MSE WALL WITH MIRAGRID XT SERIES  
NOT TO SCALE

TenCate™ Geosynthetics North America assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate™ Geosynthetics North America disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Mirafi® is a registered trademark of Nicolon Corporation..

© 2010 TenCate Geosynthetics North America

0710